


Wilbert WT 650.48 e.tronic (110 kW)

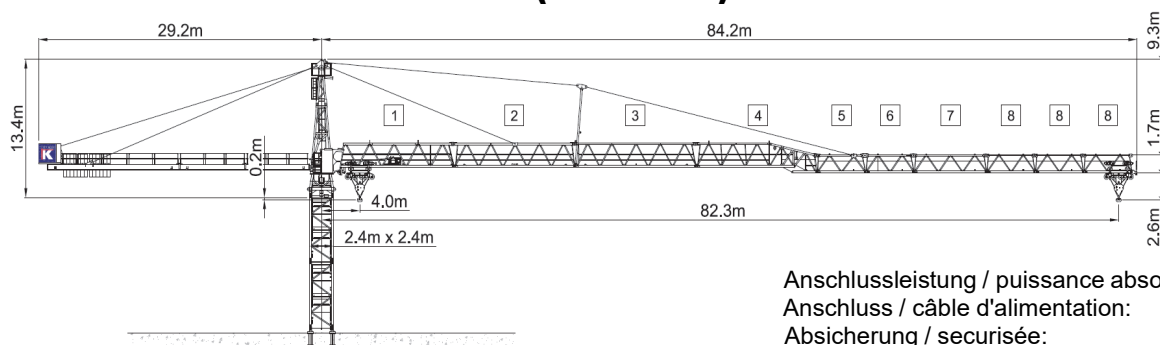

Anschlussleistung / puissance absorbée: 184 kVA
 Anschluss / câble d'alimentation: 4 x 95□
 Absicherung / sécurisée: 200 A
 Anlaufstrom / courant de pointe maxi: 242 A

Ausladung (m) / portée (m)	15	20	25	30	32.5	35	37.5	40	42.5	45	47.5	50	52.5	55	57.5	60	62.5	65	67.5	70	72.5	75	77.5	80	82.5
82.5 4.0 - 12.6	39.8	28.9	22.5	18.1	16.5	15.0	13.8	12.7	11.8	10.9	10.1	9.5	8.8	8.3	7.8	7.3	6.9	6.5	6.1	5.8	5.4	5.1	4.9	4.6	4.4
80 4.0 - 13.1	41.7	30.4	23.6	19.1	17.3	15.8	14.5	13.4	12.4	11.5	10.7	10.0	9.4	8.8	8.3	7.8	7.3	6.9	6.5	6.2	5.8	5.5	5.2	5.0	
77.5 4.0 - 13.6	43.3	31.6	24.6	19.9	18.4	16.6	15.2	14.1	13.0	12.1	11.3	10.5	9.9	9.3	8.7	8.2	7.7	7.3	6.9	6.5	6.2	5.9	5.6		
75 4.0 - 13.9	44.3	32.4	25.2	20.4	18.6	17.0	15.6	14.4	13.4	12.4	11.6	10.8	10.2	9.5	9.0	8.4	8.0	7.5	7.1	6.7	6.4	6.1			
72.5 4.0 - 14.1	45.2	33.0	25.7	20.8	18.9	17.3	15.9	14.7	13.7	12.7	11.9	11.1	10.4	9.8	9.2	8.6	8.2	7.7	7.3	6.9	6.6				
70 4.0 - 14.2	45.3	33.1	25.8	20.9	19.0	17.4	16.0	14.8	13.7	12.8	11.9	11.1	10.4	9.8	9.2	8.7	8.2	7.8	7.3	7.0					
67.5 4.0 - 14.3	45.6	33.3	26.0	21.1	19.2	17.5	16.1	14.9	13.8	12.9	12.0	11.2	10.5	9.9	9.3	8.8	8.3	7.8	7.4						
65 4.0 - 14.4	46.2	33.8	26.3	21.3	19.4	17.8	16.4	15.1	14.0	13.0	12.2	11.4	10.7	10.0	9.4	8.9	8.4	8.0							
62.5 4.0 - 14.5	46.4	33.9	26.4	21.4	19.5	17.9	16.4	15.2	14.1	13.1	12.2	11.4	10.7	10.1	9.5	8.9	8.5								
60 4.0 - 14.6	46.8	34.2	26.6	21.6	19.7	18.0	16.6	15.3	14.2	13.2	12.4	11.6	10.8	10.2	9.6	9.1									
57.5 4.0 - 14.7	47.0	34.3	26.8	21.7	19.8	18.1	16.7	15.4	14.3	13.3	12.4	11.6	10.9	10.2	9.7										
55 4.0 - 14.8	47.3	34.6	27.0	21.9	20.0	18.3	16.8	15.6	14.4	13.4	12.5	11.7	11.0	10.4											
52.5 4.0 - 14.8	47.5	34.7	27.1	22.0	19.9	18.3	16.7	15.6	14.4	13.5	12.5	11.8	11.0												
50 4.0 - 15.0	48.0	35.2	27.4	22.3	20.3	18.6	17.1	15.8	14.7	13.7	12.8	12.0													
47.5 4.0 - 15.2	48.0	35.6	27.8	22.6	20.6	18.8	17.3	16.0	14.9	13.9	13.0														
45 4.0 - 15.3	48.0	36.0	28.0	22.8	20.8	19.1	17.6	16.2	15.1	14.1															
42.5 4.0 - 15.5	48.0	36.6	28.6	23.2	21.2	19.4	17.9	16.5	15.4																
40 4.0 - 15.8	48.0	37.2	29.1	23.6	21.6	19.8	18.2	16.9																	
37.5 4.0 - 15.9	48.0	37.5	29.3	23.8	21.7	19.9	18.4																		
35 4.0 - 16.0	48.0	37.9	29.6	24.1	22.0	20.2																			
30 4.0 - 16.2	48.0	38.3	29.9	24.4																					

Ausladung (m) / portée (m)	15	20	25	30	32.5	35	37.5	40	42.5	45	47.5	50	52.5	55	57.5	60	62.5	65	67.5	70	72.5	75	77.5	80	82.5
82.5 4.0 - 18.4	32.0	29.2	22.8	18.4	16.8	15.3	14.1	13.0	12.1	11.2	10.4	9.8	9.1	8.6	8.1	7.6	7.2	6.8	6.4	6.1	5.7	5.4	5.2	4.9	4.7
80 4.0 - 19.2	32.0	30.7	23.9	19.4	17.6	16.1	14.8	13.7	12.7	11.8	11.0	10.3	9.7	9.1	8.6	8.1	7.6	7.2	6.8	6.5	6.1	5.8	5.5	5.3	
77.5 4.0 - 19.9	32.0	32.0	24.9	20.2	18.4	16.9	15.5	14.4	13.3	12.4	11.6	10.8	10.2	9.6	9.0	8.5	8.0	7.6	7.2	6.8	6.5	6.2	5.9		
75 4.0 - 20.4	32.0	32.0	25.5	20.7	18.9	17.3	15.9	14.7	13.7	12.7	11.9	11.1	10.5	9.8	9.3	8.7	8.3	7.8	7.4	7.0	6.7	6.4			
72.5 4.0 - 20.7	32.0	32.0	26.0	21.1	19.2	17.6	16.2	15.0	14.0	13.0	12.2	11.4	10.7	10.1	9.5	8.9	8.5	8.0	7.6	7.2	6.9				
70 4.0 - 20.8	32.0	32.0	26.1	21.2	19.3	17.7	16.3	15.1	14.0	13.1	12.2	11.4	10.7	10.1	9.5	9.0	8.5	8.1	7.6	7.3					
67.5 4.0 - 20.9	32.0	32.0	26.3	21.4	19.5	17.8	16.4	15.2	14.1	13.2	12.3	11.5	10.8	10.2	9.6	9.1	8.6	8.1	7.7						
65 4.0 - 21.1	32.0	32.0	26.6	21.6	19.7	18.1	16.7	15.4	14.3	13.3	12.5	11.7	11.0	10.3	9.7	9.2	8.7	8.3							
62.5 4.0 - 21.2	32.0	32.0	26.7	21.7	19.8	18.2	16.7	15.5	14.4	13.4	12.5	11.7	11.0	10.4	9.8	9.2	8.8								
60 4.0 - 21.4	32.0	32.0	26.9	21.9	20.0	18.3	16.9	15.6	14.5	13.5	12.7	11.9	11.1	10.5	9.9	9.4									
57.5 4.0 - 21.5	32.0	32.0	27.1	22.0	20.1	18.4	17.0	15.7	14.6	13.6	12.7	11.9	11.2	10.5	10.0										
55 4.0 - 21.6	32.0	32.0	27.3	22.2	20.3	18.6	17.1	15.9	14.7	13.7	12.8	12.0	11.3	10.7											
52.5 4.0 - 21.7	32.0	32.0	27.4	22.3	20.3	18.6	17.2	15.9	14.8	13.8	12.9	12.1	11.4												
50 4.0 - 21.9	32.0	32.0	27.7	22.6	20.6	18.9	17.4	16.1	15.0	14.0	13.1	12.3													
47.5 4.0 - 22.2	32.0	32.0	28.1	22.9	20.9	19.1	17.6	16.3	15.2	14.2	13.3														
45 4.0 - 22.4	32.0	32.0	28.4	23.1	21.1	19.4	17.9	16.5	15.4	14.4															
42.5 4.0 - 22.8	32.0	32.0	28.9	23.5	21.5	19.7	18.2	16.8	15.7																
40 4.0 - 23.1	32.0	32.0	29.4	23.9	21.9	20.1	18.5	17.2																	
37.5 4.0 - 23.3	32.0	32.0	29.6	24.1	22.0	20.2	18.7																		
35 4.0 - 23.5	32.0	32.0	29.9	24.3	22.2	20.4																			
30 4.0 - 23.7	32.0	32.0	30.2	24.7																					



Motor FU (kW) 110
m/min. 0 - 120



Motor FU (kW) 22
m/min. 8 - 100



Motor FU (kW) 2 x 11
r.p.m 0.8



Kaufmann Turmkrane AG

Rütisbergstr. 8, CH-8156 Oberhasli / ZH

Tel. 043 411 08 30

www.turmkrane.ch / info@krankaufmann.ch